






Expand productivity on the go

Dell Pro 14 Plus Portable Monitor

MODEL: P1425

The world's # 1 monitor company*

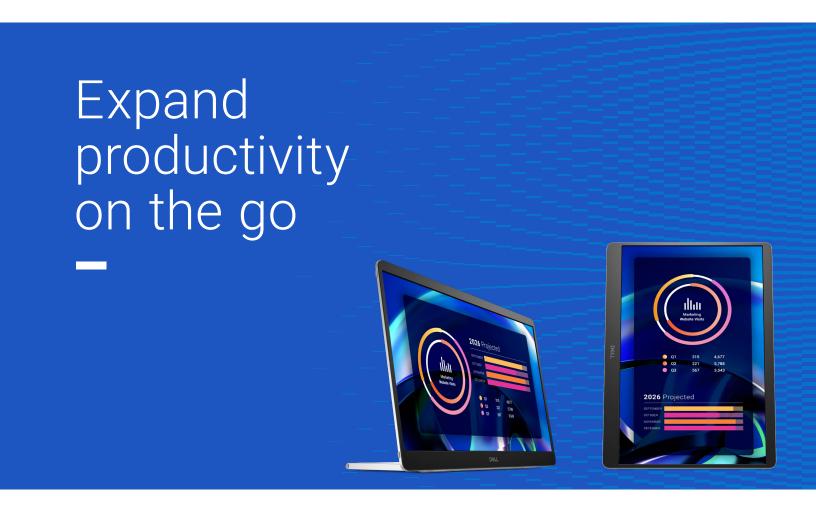

Experience dual-screen productivity anywhere with this 14" portable monitor.

Portable design

This sleek and portable monitor features an integrated sensor and a well-designed stand, allowing transitions between landscape and portrait modes for various content.

With a continuous tilt stand that bends from 10 to 90 degrees and VESA-mount compatibility, this monitor adapts perfectly to your preferred setup.

See your work in clear details

The 16:10 panel offers expanded screen space, providing better visibility and a more comfortable viewing experience.

IPS technology ensures consistent colors across different angles, while ComfortView Plus helps reduce blue light emissions without compromising color accuracy.

With support of up to 16.7 million colors, 100% sRGB coverage, and a 1500:1 contrast ratio, it delivers clear details, deep blacks, and brighter whites — offering a truly captivating viewing experience.

Connect with ease

Set up your monitor effortlessly with a single USB-C cable that handles video, power, and up to 65W charging.


USB-C ports on each side offer flexibility to place your monitor to the left, right, or behind your laptop.



World's number 1 monitor company*

We deliver world-class monitors that have gone through rigorous development processes and stringent tests to ensure dependable performance. Get peace of mind with unmatched warranty and support options. Being environmentally forward in thinking, our monitors adhere to environment standards and are made with sustainable materials.

Click to explore more

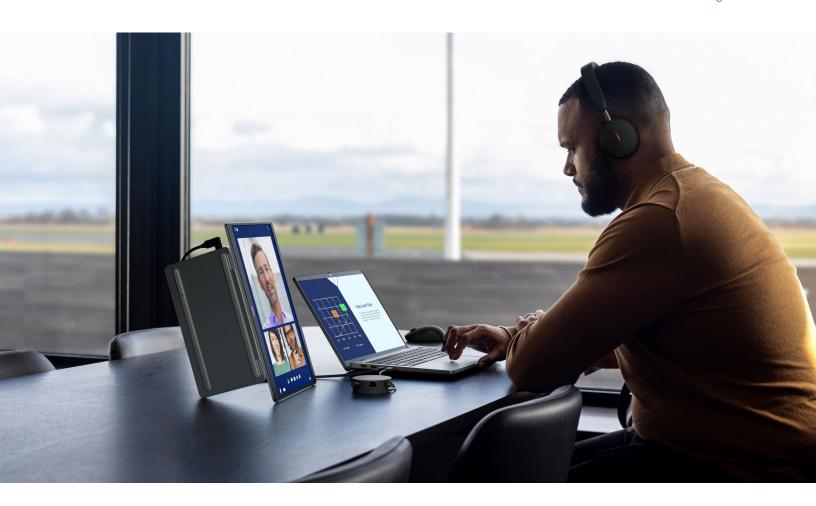

Versatile design

Conveniently set up your monitor to the left, right or behind your laptop; the USB-C port on each side allow for versatility.

Adapts to your needs

Find your perfect setup with a continuous tilt stand that adjusts from 10 to 90 degrees. This monitor is also VESA-mount compatible.





On-the-go protection

Keep your monitor safe with a sleeve that has a compartment for cable storage.

Dell Display and Peripheral Manager



Screen image simulated for illustrative purposes only. Monitor model varies.

Dell Display and Peripheral Manager

Experience Dell's singular application to optimize the performance of your entire Dell PC workspace!

Maximize productivity

Easy Arrange tiles apps across screens with pre-set partitions and customizes up to five windows, enhancing multitasking. Easy Arrange Memory saves and restores app profiles manually, on schedule, or at start-up.

Customize your views

Work comfortably, day or night. Automate your brightness and contrast settings to match your schedule

Download Dell Display and Peripheral Manager





Made for you, sustainably

Intentional design in every part

At the heart of our design is a commitment to sustainability. That's why our monitor helps reduce waste with a design made from recycled materials like 93% post-consumer recycled plastic including closed-loop ITE derived plastic¹, at least 20% recycled glass² and lowers logistical footprint to fit the on-the-go lifestyle.

Seamlessly transition from old to new technology

We can help you responsibly and securely retire your legacy IT equipment, regardless of brand, while addressing your sustainability goals.

Environmental standards

This monitor is certified ENERGY STAR® and registered EPEAT Gold with Climate+ meaning it has met high standards for energy efficiency and climate impact.³

Packaging with purpose

This monitor ships in a box made from 100% renewable materials. We are reducing plastic waste wherever possible and transitioning to a responsible fiber-based solution.⁴

- 1 Based on internal analysis, January 2025. Percentage is based on plastic weight. Post-consumer recycled plastic: 82%, Closed loop ITE derived plastic: 11%.
- 2 Applicable to all new monitors launching in CY 2024. Recycled glass is present in monitor panel. Based on internal analysis, January 2024.
- 3 EPEAT registered where applicable. EPEAT registration varies by country. See www.epeat.net for registration status by country
- 4 Applies to all Dell monitors launched since 2023. Made from FSC mix sources which is a mix of material from FSC certified forests, recycled content and/or FSC controlled wood. Based on internal analysis, January 2025. Cushions now made from corrugated materials.

Ports & Slots



- **1** Power On/Off button (with LED indicator)
- 2 USB Type-C (support Alt mode DP 1.2 and PD function)
- **3** USB Type-C (support Alt mode DP 1.2 and PD function)
- **4** Function buttons

FEATURE	TECHNICAL SPECIFICATION
MODEL	Dell Pro 14 Plus Portable Monitor - P1425
DIAGONAL VIEWING SIZE	355.7 mm (14.0 in.)
PANEL TYPE	In-Plane Switching (IPS) Technology
MAXIMUM PRESET RESOLUTION AND REFRESH RATE	1920 x 1200 up to 60 Hz/1200 x 1920 up to 60 Hz
VIEWING ANGLE	Horizontal: 178° Vertical: 178°
PIXEL PITCH	Horizontal: 0.15708 mm Vertical: 0.15708 mm
PIXEL PER INCH (PPI)	162
CONTRAST RATIO	1500:1 (typical)
ASPECT RATIO	16:10
BACKLIGHT TECHNOLOGY	LED Edgelight System
BRIGHTNESS	400 cd/m² (typical)
RESPONSE TIME	Normal mode: 7 ms (gray to gray)
COLOR GAMUT	sRGB 100% (CIE 1931) (typical)
COLOR DEPTH	16.7 million colors
TÜV CERTIFICATION	Yes, Dell ComfortView Plus
CONNECTIVITY	Video port • 2 x USB-C ports (DisplayPort 1.2 Alt Mode, Power pass-through of up to 65W) (HDCP 1.4) (Supports up to 1920 x 1200 60 Hz)
USB POWER DELIVERY	65 W
ADJUSTABILITY	• Tilt +10°/+90° • Portrait +16.5°
DISPLAY SCREEN COATING	Anti-glare with hard-coating 3H
SOFTWARE COMPATIBILITY	Dell Display and Peripheral Manager (DDPM) for Windows operating system
OPERATION TIME SUPPORT	12 hours a day, 7 days a week (12/7)
VOLTAGE REQUIRED	5V or 9V or 15V/3A or 20V/5A
POWER CONSUMPTION	5.4 W (On mode) ¹ 0.3 W (Off mode) ¹ 0.3 W (Standby mode) ¹ 7.0 W (Max.) ²
BEZEL WIDTH - TOP	13.60 mm (0.54 in.)
BEZEL WIDTH – LEFT OR RIGHT	5.95 mm (0.23 in.)
BEZEL WIDTH – BOTTOM	21.44 mm (0.84 in.)

DIMENSIONS (WITH STAND) - HEIGHT 315.15 mm (12.41 in.) 315.15 mm (12.41	FEATURE	TECHNICAL SPECIFICATION
DIMENSIONS (WITH STAND) - DEPTH 14.65 mm (0.58 in.)		223.54 mm (8.80 in.)
DIMENSIONS (WITHOUT STAND) - HEIGHT 223.54 mm (8.80 in.) 235.15 mm (12.41 in.) 245.15 mm (12.41 in		315.15 mm (12.41 in.)
MITHOUT STAND - HEIGHT		14.65 mm (0.58 in.)
(WITHOUT STAND) - WIDTH DIMENSIONS (WITHOUT STAND) - DEPTH STAND DIMENSIONS - HEIGHT STAND DIMENSIONS - WIDTH STAND DIMENSIONS - UIDTH STAND DIMENSIONS - UIDTH STAND DIMENSIONS - DEPTH WEIGHT WITH PACKAGING WEIGHT WITH STAND ASSEMBLY AND CABLES WEIGHT WITHOUT STAND O.62 kg (1.36 lb) WEIGHT WITHOUT STAND ASSEMBLY WITHOUT CABLES) WEIGHT OF STAND ASSEMBLY FLAT PANEL MOUNT INTERFACE BUILT-IN DEVICES COMPLIANT STANDARDS COMPLIANT STANDA	(WITHOUT STAND) -	223.54 mm (8.80 in.)
(WITHOUT STAND) - DEPTH STAND DIMENSIONS - HEIGHT	(WITHOUT STAND) -	315.15 mm (12.41 in.)
STAND DIMENSIONS - WIDTH STAND DIMENSIONS - DEPTH WEIGHT WITH PACKAGING WEIGHT WITH STAND ASSEMBLY (WITHOUT CABLES) WEIGHT WITHOUT STAND ASSEMBLY (WITHOUT CABLES) WEIGHT OF STAND ASSEMBLY FLAT PANEL MOUNT INTERFACE BUILT-IN DEVICES COMPLIANT STANDARDS	(WITHOUT STAND) -	4.60 mm (0.18 in.)
- WIDTH STAND DIMENSIONS - DEPTH WEIGHT WITH PACKAGING WEIGHT WITH STAND ASSEMBLY AND CABLES WEIGHT OF STAND ASSEMBLY (WITHOUT CABLES) WEIGHT OF STAND STAND ASSEMBLY (WITHOUT CABLES) WEIGHT OF STAND ASSEMBLY (WITHOUT CABLES) WEIGHT OF STAND ASSEMBLY (WITHOUT CABLES) WEIGHT OF STAND ASSEMBLY (WITHOUT CABLES) WEIGHT WITHOUT CABLES) WEIGHT WITHOUT CABLES WEIGHT WITHOUT WITHOUT CABLES WEIGHT WITHOUT WITHOUT CABLES WEIGHT WITHOUT WITHOUT CABLES WEIGHT WITHOUT WITHOUT WITHOUT CABLES WEIGHT WITHOUT WIT		137.85 mm (5.43 in.)
WEIGHT WITH PACKAGING WEIGHT WITH STAND ASSEMBLY AND CABLES WEIGHT WITHOUT STAND ASSEMBLY (WITHOUT CABLES) WEIGHT OF STAND ASSEMBLY (WITHOUT CABLES) WEIGHT OF STAND ASSEMBLY FLAT PANEL MOUNT INTERFACE BUILT-IN DEVICES Auto-rotation sensor COMPLIANT STANDARDS COMPLIANT STANDARDS COMPLIANT STANDARDS COMPLIANT STANDARDS COMPLIANT STANDARDS COMPLIANT STANDARDS PEPEAT Gold with Climate+ ROHS Compliant Product Safety, EMC and Environmental Datasheets Dell Regulatory Compliance Home Page Dell and the Environment BFR/PVC Free monitor (excluding external cables). Arsenic-Free glass and Mercury-Free for the panel only. TEMPERATURE RANGE Operating: 0°C to 40°C (32°F to 104°F) Non-Operating: -20°C to 60°C (-4°F to 140°F) Non-Operating: 5% to 90% (non-condensing) Non-Operating: 5% to 90% (non-condensing) ALTITUDE Operating: 5,000 m (16,404 ft) maximum Non-Operating: 12,192 m (40,000 ft) maximum Non-Operating: 12,192 m (40,000 ft) maximum Non-Operating: 12,192 m (40,000 ft) maximum Operating: 1 x USB Type-C to C upstream cable 1.00 m Operating: 1 x USB Type-C to C upstream cable 1.00 m Operating: 1 x USB Type-C to C upstream cable 1.00 m		237.00 mm (9.33 in.)
WEIGHT WITH STAND ASSEMBLY AND CABLES WEIGHT WITHOUT STAND ASSEMBLY (WITHOUT CABLES) WEIGHT OF STAND ASSEMBLY FLAT PANEL MOUNT INTERFACE BUILT-IN DEVICES Auto-rotation sensor COMPLIANT STANDARDS - ENERGY STAR 8.0 - EPEAT Gold with Climate+ - Rohls Compliant - Product Safety, EMC and Environmental Datasheets - Dell Regulatory Compliance Home Page - Dell and the Environment - BFR/PVC Free monitor (excluding external cables) Arsenic-Free glass and Mercury-Free for the panel only. TEMPERATURE RANGE - Operating: 0°C to 40°C (32°F to 104°F) - Non-Operating: -20°C to 60°C (-4°F to 140°F) - Non-Operating: 5% to 90% (non-condensing) - Non-Operating: 5% to 90% (non-condensing) - Non-Operating: 5,000 m (16,404 ft) maximum - Non-Operating: 12,192 m (40,000 ft) maximum WHAT'S INCLUDED - Monitor - 1 x USB Type-C to C upstream cable 1.00 m - QR card		9.25 mm (0.36 in.)
WEIGHT WITHOUT STAND ASSEMBLY (WITHOUT CABLES) WEIGHT OF STAND ASSEMBLY FLAT PANEL MOUNT INTERFACE BUILT-IN DEVICES COMPLIANT STANDARDS COMPLIANT STAND		1.24 kg (2.73 lb)
STAND ASSEMBLY (WITHOUT CABLES) WEIGHT OF STAND ASSEMBLY FLAT PANEL MOUNT INTERFACE BUILT-IN DEVICES Auto-rotation sensor	ASSEMBLY AND	0.62 kg (1.36 lb)
FLAT PANEL MOUNT INTERFACE BUILT-IN DEVICES Auto-rotation sensor COMPLIANT STANDARDS - EPEAT Gold with Climate+ - RoHS Compliant - Product Safety, EMC and Environmental Datasheets - Dell Regulatory Compliance Home Page - Dell and the Environment - BFR/PVC Free monitor (excluding external cables) Arsenic-Free glass and Mercury-Free for the panel only. TEMPERATURE RANGE - Operating: 0°C to 40°C (32°F to 104°F) - Non-Operating: -20°C to 60°C (-4°F to 140°F) HUMIDITY RANGE - Operating: 10% to 80% (non-condensing) - Non-Operating: 5% to 90% (non-condensing) - Non-Operating: 5,000 m (16,404 ft) maximum - Non-Operating: 12,192 m (40,000 ft) maximum WHAT'S INCLUDED - Monitor - 1 x USB Type-C to C upstream cable 1.00 m - QR card	STAND ASSEMBLY	0.35 kg (0.77 lb)
INTERFACE BUILT-IN DEVICES Auto-rotation sensor COMPLIANT STANDARDS - ENERGY STAR 8.0 - EPEAT Gold with Climate+ - RoHS Compliant - Product Safety, EMC and Environmental Datasheets - Dell Regulatory Compliance Home Page - Dell and the Environment - BFR/PVC Free monitor (excluding external cables) Arsenic-Free glass and Mercury-Free for the panel only. TEMPERATURE RANGE - Operating: 0°C to 40°C (32°F to 104°F) - Non-Operating: -20°C to 60°C (-4°F to 140°F) HUMIDITY RANGE - Operating: 10% to 80% (non-condensing) - Non-Operating: 5% to 90% (non-condensing) - Non-Operating: 5,000 m (16,404 ft) maximum - Non-Operating: 12,192 m (40,000 ft) maximum WHAT'S INCLUDED - Monitor - 1 x USB Type-C to C upstream cable 1.00 m - QR card		0.22 kg (0.48 lb)
COMPLIANT STANDARDS - ENERGY STAR 8.0 - EPEAT Gold with Climate+ - RoHS Compliant - Product Safety, EMC and Environmental Datasheets - Dell Regulatory Compliance Home Page - Dell and the Environment - BFR/PVC Free monitor (excluding external cables) Arsenic-Free glass and Mercury-Free for the panel only. TEMPERATURE RANGE - Operating: 0°C to 40°C (32°F to 104°F) - Non-Operating: -20°C to 60°C (-4°F to 140°F) - Non-Operating: 5% to 90% (non-condensing) - Non-Operating: 5% to 90% (non-condensing) - Non-Operating: 5,000 m (16,404 ft) maximum - Non-Operating: 12,192 m (40,000 ft) maximum WHAT'S INCLUDED - Monitor - 1 x USB Type-C to C upstream cable 1.00 m - QR card		VESA (100 mm x 100 mm)
STANDARDS • EPEAT Gold with Climate+ • RoHS Compliant • Product Safety, EMC and Environmental Datasheets • Dell Regulatory Compliance Home Page • Dell and the Environment • BFR/PVC Free monitor (excluding external cables). • Arsenic-Free glass and Mercury-Free for the panel only. TEMPERATURE RANGE • Operating: 0°C to 40°C (32°F to 104°F) • Non-Operating: -20°C to 60°C (-4°F to 140°F) • Operating: 10% to 80% (non-condensing) • Non-Operating: 5% to 90% (non-condensing) ALTITUDE • Operating: 5,000 m (16,404 ft) maximum • Non-Operating: 12,192 m (40,000 ft) maximum WHAT'S INCLUDED • Monitor • 1 x USB Type-C to C upstream cable 1.00 m • QR card	BUILT-IN DEVICES	Auto-rotation sensor
Non-Operating: -20°C to 60°C (-4°F to 140°F) HUMIDITY RANGE		EPEAT Gold with Climate+ ROHS Compliant Product Safety, EMC and Environmental Datasheets Dell Regulatory Compliance Home Page Dell and the Environment BFR/PVC Free monitor (excluding external cables).
Non-Operating: 5% to 90% (non-condensing) Operating: 5,000 m (16,404 ft) maximum Non-Operating: 12,192 m (40,000 ft) maximum Monitor 1 x USB Type-C to C upstream cable 1.00 m QR card		
Non-Operating: 12,192 m (40,000 ft) maximum WHAT'S INCLUDED Monitor 1 x USB Type-C to C upstream cable 1.00 m QR card	HUMIDITY RANGE	
 1 x USB Type-C to C upstream cable 1.00 m QR card 	ALTITUDE	
	WHAT'S INCLUDED	• 1 x USB Type-C to C upstream cable 1.00 m • QR card

¹ As defined in EU 2019/2021 and EU 2019/2013.
2 Max brightness and contrast setting with maximum power loading on all USB ports.

Steadfast reliability

As the No. 1 monitor company worldwide*, we take pride in our unyielding commitment to quality and the utmost in customer satisfaction.

Minimize downtime

Your monitor comes with a 3-year Advanced Exchange Service¹ so that if a replacement becomes necessary, it will be shipped to you the next business day during your 3-year Limited Hardware Warranty.²

Get a higher level of support

Upgrade to 24x7 specialized technical phone support with the Dell ProSupport option.³



Technical specifications subject to change without prior notice. Product availability varies by country. Please contact your Dell representative for more information.

© 2025 Dell Inc. or its subsidiaries. All rights reserved. Dell Technologies, Dell, EMC, Dell EMC and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners. USB Type-C® and USB-C® are registered trademarks of USB Implementers Forum.

^{*} Dell monitors are #1 Worldwide for 10 years! Source: IDC Worldwide Quarterly PC Monitor Tracker, Q3 2024. From 2014 to 2024

¹ Advanced Exchange: Dell will send you a replacement monitor the next business day in most cases if deemed necessary after phone/online diagnosis. Shipping times may vary by location and for monitors 55* and above. Fee charged for failure to return defective unit. See dell.com/servicecontracts/global.

² For copy of Ltd Hardware Warranty, write to Dell USA LP, Attn: Warranties, One Dell Way, Round Rock, TX 78682 or see https://www.dell.com/warranty

³ Availability varies, please visit www.dell.com/support for details. In some countries, hours for in-region support may vary. Support after local business hours may be provided in a language other than the local language.