

# ALIENWARE 27 4K QD-OLED GAMING MONITOR

## AW2725Q



WORLD’S HIGHEST PIXEL DENSITY IN A QD-OLED MONITOR\*

*\*Based on internal analysis, November 2024.*



*TABLE OF CONTENTS*

Feature Overview	3-5
Anti-burn in tech and warranty	6
Advanced QD-OLED printing	7
Dimensions & Weight	8
Connectivity	9
Technical Specifications	10

# ULTIMATE VISUAL FIDELITY



The AW2725Q achieves **peak pixel clarity** thanks to the **world’s highest pixel density on a QD-OLED monitor of 166 PPI** (pixels per inch), enabled by an **ultra-precise QD-OLED inkjet printing** manufacturing process.

With a screen size of **27” at 4K resolution** (3840x2160) the AW2725Q delivers mesmerizingly crisp visuals that bring virtual worlds to life.

A L I E N W A R E™ 

# OUTSTANDING COLOR AND MOTION PERFORMANCE



**Infinite contrast ratio, Dolby Vision™ and VESA DisplayHDR True Black 400** produce greater visual depth and a stunning range of dark to light colors in every scene.

Excellent **DCI-P3 99%** color coverage and **Delta E<2** color accuracy mean vibrant visuals are seen as creators intended.

Hardware-based **ComfortView Plus** provides a low blue light solution to reduce eyestrain without sacrificing color, while **Creator Mode** supports color-sensitive work.

A **240Hz refresh rate** allows for exceptionally smooth motion, and combined with a near-instantaneous **0.03ms response time**, blurring and ghosting are virtually eliminated, even in fast-paced scenes.

**NVIDIA G-SYNC Compatible, AMD FreeSync Premium Pro, and VESA AdaptiveSync** certification deliver tear- and stutter-free motion with any of today's graphics cards.

A L I E N W A R E™ 

# ICONIC NEW AW30 DESIGN



New **small-footprint base** for more desk space.



**AlienFX lighting** and new **AW30 "glyph" iconography**.



Revamped **360-degree ventilation** for optimal thermals, and simplified **cable management** through monitor stand.



**New monitor OSD (on-screen display) menu** plus **Alienware Command Center 6.6** (pictured) support.

# ANTI-BURN IN TECHNOLOGY BACKED BY PREMIUM SUPPORT

**Graphite film heatsink**  
Dissipates heat to help fight burn-in

Oxide backplane

Blue self-emitting layer

Quantum Dot light-emitting layer

Anti-reflective film

AW2725Q incorporates a **graphite film heatsink** within its panel layers which helps dissipate heat, helping **fight OLED burn-in**.

Additionally, an **enhanced AI algorithm** regulates electrical current on a per pixel basis, in order to maintain image uniformity and **extend display health** over time. Pixel refresh, panel refresh, and pixel shift features add another layer of display health preservation measures.

**Dell Premium Panel Exchange** allows a free panel replacement during the Limited Hardware Warranty\* period even if only one bright pixel is found. Premium Panel Exchange is not a standard or upsell Support service.


The monitor also comes with **Advanced Exchange Service\*\***. If, after remote diagnosis, a monitor replacement becomes necessary, it will be shipped to you the next business day.

\* For a copy of Ltd Hardware Warranty, write to Dell USA LP, Attn: Warranties, One Dell Way, Round Rock, TX 78682 or see <http://www.dell.com/warranty>.

\*\* Advanced Exchange Service replaces hardware after remote diagnosis. The customer must return the original hardware to Dell according to the rules specified. Advanced Exchange Service is subject to country availability. (c) For complete details about On-site Service or Advanced Exchange Service, see [dell.com/servicecontracts](http://dell.com/servicecontracts)

A L I E N W A R E™ 


# ADVANCED QD-OLED INKJET PRINTING PROCESS

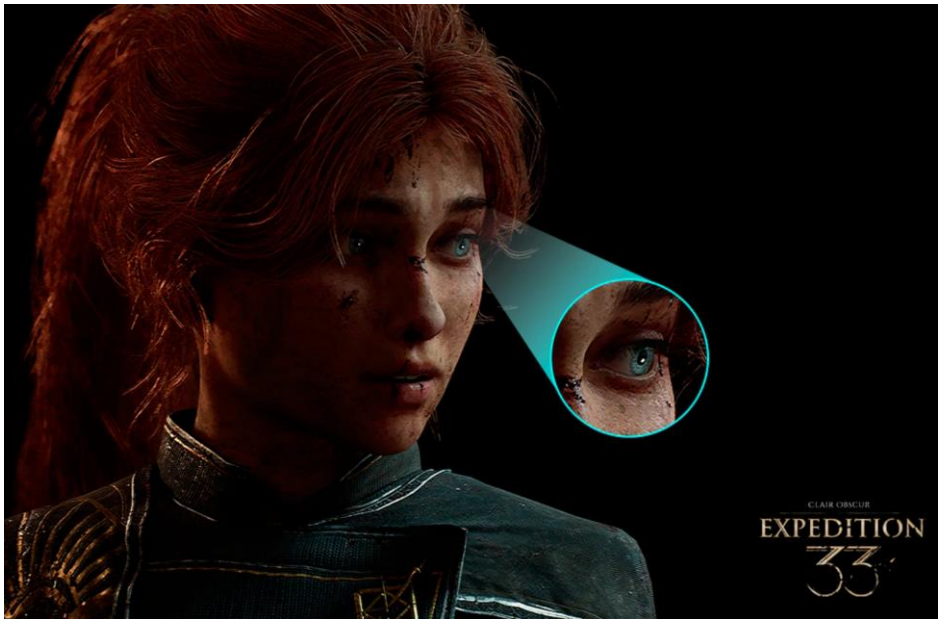


## QD-OLED subpixels by PPI




**111 PPI**  
27" QHD  
(2560x1440)  
AW2725DF



**140 PPI**  
32" 4K  
(3840x2160)  
AW3225QF



**166 PPI**  
32" 4K  
(3840x2160)  
**AW2725Q**

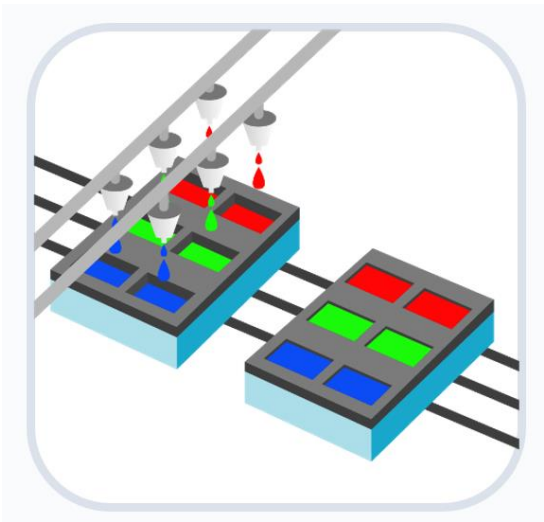

**The more pixels per inch, the higher precision is required** to create each pixel in the manufacturing process due to the miniscule size of each QD-OLED subpixel.

The AW2725Q's combination of high detail and QD-OLED performance is made possible by an **ultra-precise QD-OLED printing process** that sees QD ink sprayed through micro nozzles in micrometer sizes; a level of precision that marks a **new achievement** in QD-OLED technology.

*Illustrations courtesy Samsung Displays.*

A L I E N W A R E™ 

# DIMENSIONS AND WEIGHT



**Standard units**

**Dimensions:**

- Bezel Width – Top: 0.24 in.
- Bezel Width – Left or Right: 0.38 in.
- Bezel Width – Bottom: 0.67 in.
- Dimensions (with stand) – Height (extended): 20.32 in.
- Dimensions (with stand) – Height (compressed): 15.98 in.
- Dimensions (with stand) – Width: 24 in.
- Dimensions (with stand) – Depth: 8.27 in.
- Dimensions (without stand) – Height: 14.01 in.
- Dimensions (without stand) – Width: 24 in.
- Dimensions (without stand) – Depth: 2.86 in.
- Stand dimensions – Height (extended): 16.21 in.
- Stand dimensions – Height (compressed): 14.66 in.
- Stand dimensions – Width: 9.45 in.
- Stand dimensions – Depth: 8.27 in.

**Weight:**

- Weight with packaging: 21.95 lb
- Weight with stand assembly and cables: 14.97 lb
- Weight without stand assembly (without cables): 9.48 lb
- Weight of stand assembly: 4.56 lb

**Metric units**


**Dimensions:**

- Bezel Width – Top: 6.04 mm
- Bezel Width – Left or Right: 9.77 mm
- Bezel Width – Bottom: 17 mm
- Dimensions (with stand) – Height (extended): 516.01 mm
- Dimensions (with stand) – Height (compressed): 406.01mm
- Dimensions (with stand) – Width: 609.51 mm
- Dimensions (with stand) – Depth: 210 mm
- Dimensions (without stand) – Height: 355.97 mm
- Dimensions (without stand) – Width: 609.51 mm
- Dimensions (without stand) – Depth: 72.63 mm
- Stand dimensions – Height (extended): 411.80 mm
- Stand dimensions – Height (compressed): 372.41 mm
- Stand dimensions – Width: 240 mm
- Stand dimensions – Depth: 210 mm

**Weight:**

- Weight with packaging: 9.96 kg
- Weight with stand assembly and cables: 6.79 kg
- Weight without stand assembly (without cables): 4.30 kg
- Weight of stand assembly: 2.07 kg

# CONNECTIVITY

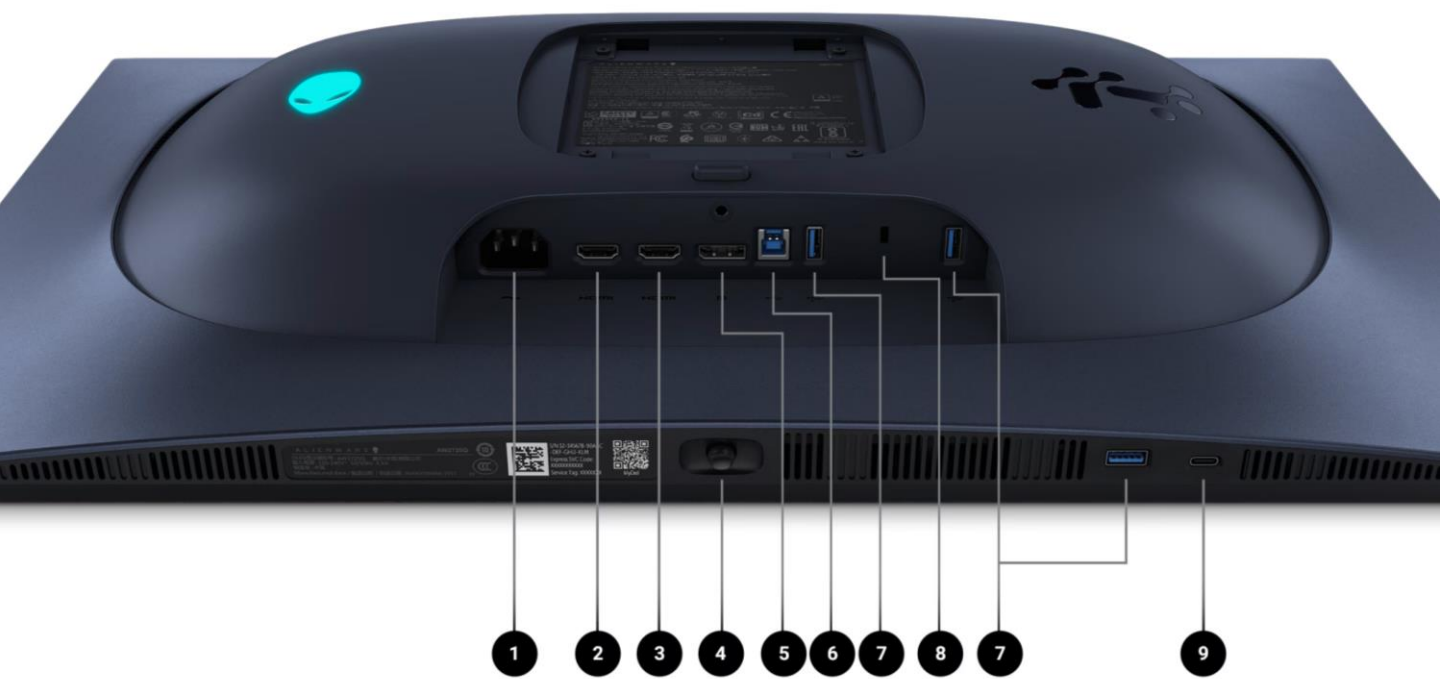

- 1. Power Connector
- 2. HDMI 2.1 FRL port with eARC
- 3. HDMI 2.1 FRL port
- 4. Joystick
- 5. DisplayPort
- 6. USB 5Gbps Type-B upstream
- 7. 3 x USB 5Gbps Type-A downstream
- 8. Security lock slot
- 9. USB-C 5Gbps downstream with Power Delivery up to 15W

<b>Model:</b>	<b>Alienware 27 4K QD-OLED Gaming Monitor - AW2725Q</b>	
Diagonal Viewing Size:	677.4 mm (26.7 in.)	
Panel Type	Quantum Dots-Organic Light-Emitting Diode (QD-OLED) Technology	
Maximum Preset Resolution and refresh rate	3840 x 2160 up to 240 Hz	
Viewing Angle	Horizontal: 178° Vertical: 178°	
Pixel Pitch	Horizontal: 0.153 mm Vertical: 0.153 mm	
Pixel Per Inch (PPI)	166	
Contrast Ratio	1.5 million:1	
Aspect Ratio	16:9	
Backlight Technology	Not Applicable (for QD OLED)	
Brightness	250 cd/m <sup>2</sup> (typical) 1000 cd/m <sup>2</sup> (HDR peak at APL 3%)	
HDR	VESA DisplayHDR True Black 400 Dolby Vision HDR AMD FreeSync Premium Pro	
Response Time	0.03 ms (gray to gray)	
Color Gamut	DCI-P3 99% (CIE 1976) (typical)	
Color Depth	1.07 billion colors	
Low Blue Light	Yes, ComfortView Plus (Hardware solution)	
	<b>Video ports</b> <ul style="list-style-type: none"> <li>• 1 DisplayPort 1.4 (HDCP 1.4 &amp; 2.3) port (Supports up to 3840 x 2160, 240 Hz, DSC, HDR)</li> <li>• 2 HDMI ports (HDCP 1.4 &amp; 2.3) (Supports up to 3840 x 2160, 240 Hz, FRL, HDR, VRR as per specified in HDMI 2.1) (including one HDMI 2.1 FRL with eARC/ARC - to support Dolby ATMOS signal pass-through)</li> </ul>	<b>USB ports</b> <ul style="list-style-type: none"> <li>• 1 USB 5Gbps Type-B upstream port</li> <li>• 3 USB 5Gbps Type-A downstream ports</li> <li>• 1 USB-C 5Gbps downstream port with 15 W charging</li> </ul>
Variable Refresh Rate	<ul style="list-style-type: none"> <li>• NVIDIA® G-SYNC™ Compatible</li> <li>• AMD Free-Sync™ Premium Pro</li> <li>• VESA AdaptiveSync</li> </ul>	
Adjustability	<ul style="list-style-type: none"> <li>• Height adjustment up to 110 mm</li> <li>• Tilt -5°/+21°</li> <li>• Swivel -20°/+20°</li> <li>• Pivot -90°/+90°</li> </ul>	
Display Screen Coating	Anti-reflection	
PbP / PiP / KVM	<ul style="list-style-type: none"> <li>• Picture by Picture (PbP)</li> <li>• Picture in Picture (PiP)</li> </ul>	
Software Compatibility	Alienware Command Center (AWCC) for Windows operating system	
Voltage Required	100 VAC to 240 VAC/50 Hz or 60 Hz ± 3 Hz/2.2 A	
Power Consumption	<ul style="list-style-type: none"> <li>• 39.4 W (On mode)</li> <li>• 31.1 W (Typical)</li> <li>• 0.3 W (Off mode)</li> <li>• 0.5 W (Standby mode)</li> <li>• 190 W (Max.)</li> </ul>	
Energy Efficiency Class (A to G) (EU reg.)	G	
Dimensions & Weight	<b>Standard units</b> Dimensions: Bezel Width – Top: 0.24 in. Bezel Width – Left or Right: 0.38 in. Bezel Width – Bottom: 0.67 in. Dimensions (with stand) – Height (extended): 20.32 in. Dimensions (with stand) – Height (compressed): 15.98 in. Dimensions (with stand) – Width: 24 in. Dimensions (with stand) – Depth: 8.27 in. Dimensions (without stand) – Height: 14.01 in. Dimensions (without stand) – Width: 24 in. Dimensions (without stand) – Depth: 2.86 in. Stand dimensions – Height (extended): 16.21 in. Stand dimensions – Height (compressed): 14.66 in. Stand dimensions – Width: 9.45 in. Stand dimensions – Depth: 8.27 in.  Weight: Weight with packaging: 21.95 lb Weight with stand assembly and cables: 14.97 lb Weight without stand assembly (without cables): 9.48 lb Weight of stand assembly: 4.56 lb	<b>Metric units</b> Dimensions: Bezel Width – Top: 6.04 mm Bezel Width – Left or Right: 9.77 mm Bezel Width – Bottom: 17 mm Dimensions (with stand) – Height (extended): 516.01 mm Dimensions (with stand) – Height (compressed): 406.01mm Dimensions (with stand) – Width: 609.51 mm Dimensions (with stand) – Depth: 210 mm Dimensions (without stand) – Height: 355.97 mm Dimensions (without stand) – Width: 609.51 mm Dimensions (without stand) – Depth: 72.63 mm Stand dimensions – Height (extended): 411.80 mm Stand dimensions – Height (compressed): 372.41 mm Stand dimensions – Width: 240 mm Stand dimensions – Depth: 210 mm  Weight: Weight with packaging: 9.96 kg Weight with stand assembly and cables: 6.79 kg Weight without stand assembly (without cables): 4.30 kg Weight of stand assembly: 2.07 kg
Flat Panel Mount Interface	VESA (100 mm x 100 mm)	
Security	Security lock slot (cable lock sold separately) Anti-theft stand lock slot (to panel)	
Compliant Standards	<ul style="list-style-type: none"> <li>• RoHS Compliant</li> <li>• Product Safety, EMC and Environmental Datasheets</li> <li>• Dell Regulatory Compliance Home Page</li> <li>• Dell and the Environment</li> <li>• BFR/PVC reduced monitor (The circuit boards are made from BFR/PVC-free laminates.)</li> <li>• Arsenic-free glass and mercury-free for the panel only</li> </ul>	
Temperature Range	<ul style="list-style-type: none"> <li>• Operating: 0°C to 40°C (32°F to 104°F)</li> <li>• Non-operating: -20°C to 60°C (-4°F to 140°F)</li> </ul>	
Humidity Range	<ul style="list-style-type: none"> <li>• Operating: 10% to 80% (non-condensing)</li> <li>• Non-Operating: 5% to 90% (non-condensing)</li> </ul>	
Altitude	<ul style="list-style-type: none"> <li>• Operating: 5,000 m (16,400 ft) maximum</li> <li>• Non-Operating: 12,192 m (40,000 ft) maximum</li> </ul>	
What's Included	<ul style="list-style-type: none"> <li>• Monitor with stand</li> <li>• Power cable</li> <li>• 1 DisplayPort-DisplayPort cable - 1.80 m</li> <li>• 1 HDMI cable - 1.80 m</li> <li>• 1 USB Type-A to Type-B 5Gbps cable - 1.80 m</li> <li>• Microfiber cloth</li> <li>• QR Card</li> <li>• Safety, Environmental, and Regulatory Information</li> <li>• Alienware Sticker</li> </ul>	