

ALIENWARE 27 280HZ QD-OLED GAMING MONITOR AW2725D



ENTER THE WORLD OF QD-OLED PERFORMANCE

ALIENWARE™ 



TABLE OF CONTENTS

Feature Overview	3-5
Anti-burn in tech and warranty	6
Connectivity	7
Technical Specifications	8

STUNNING QD-OLED VISUALS



The **Alienware 27 280Hz Gaming Monitor - AW2725D** sets a new standard for gamers seeking premium **QD-OLED visuals** at an accessible price point.

With its **QHD (2560x1440) resolution** on a sleek **27" flat panel**, this monitor offers a remarkable front-of-screen experience for both casual and competitive gaming.

A L I E N W A R E™ 

RICH QD-OLED COLOR MEETS FAST, FLUID MOTION



 NVIDIA
G-SYNC

 AMD
FreeSync
Premium Pro

 VESA CERTIFIED
AdaptiveSync

 DISPLAY
280

 VESA CERTIFIED
DisplayHDR™

 TRUE
BLACK
400

The **AW2725D** has key features that combine amazing color with crystal clear motion:

- **Infinite Contrast Ratio** with **VESA HDR True Black 400**, providing deep, rich shadows and up to 1,000 nits peak brightness.
- **DCI-P3 99.3% Color Coverage** and **Delta E <2 color accuracy**, ensuring accurate, lifelike colors for an immersive experience.
- **280Hz Refresh Rate** and **0.03ms (GtG) Response Time** for smooth, blur-free motion, keeping images clear and fluid, even during fast-paced gameplay.
- **NVIDIA G-SYNC Compatible, AMD FreeSync Premium Pro** and **VESA AdaptiveSync** certification for seamless, tear- and stutter-free visuals.

A L I E N W A R E™ 

ICONIC NEW AW30 DESIGN

AlienFX lighting and new **AW30** "glyph" iconography.

New monitor OSD (on-screen display) menu plus **Alienware Command Center 6.6** support.

Revamped **360-degree ventilation** for optimal thermals

Simplified **cable management** through **fully adjustable** monitor stand.

New **small-footprint base** for more desk space.

A L I E N W A R E™ 

ANTI-BURN IN TECHNOLOGY BACKED BY PREMIUM SUPPORT



AW2725D incorporates a **graphite film heatsink** within its panel layers which helps dissipate heat, helping **fight OLED burn-in**.

Additionally, an **enhanced AI algorithm** regulates electrical current on a per pixel basis, in order to maintain image uniformity and **extend display health** over time. Pixel refresh, panel refresh, and pixel shift features add another layer of display health preservation measures.

Dell Premium Panel Exchange allows a free panel replacement during the Limited Hardware Warranty* period even if only one bright pixel is found. Premium Panel Exchange is not a standard or upsell Support service.

The monitor also comes with **Advanced Exchange Service****. If, after remote diagnosis, a monitor replacement becomes necessary, it will be shipped to you the next business day.


Upgrade to **Alienware Care** and enjoy **24/7 expert support** for your monitor, including setup, configuration, software assistance, troubleshooting, and seamless compatibility with hardware from other brands.

* For a copy of Ltd Hardware Warranty, write to Dell USA LP, Attn: Warranties, One Dell Way, Round Rock, TX 78682 or see <http://www.dell.com/warranty>.

** Advanced Exchange Service replaces hardware after remote diagnosis. The customer must return the original hardware to Dell according to the rules specified. Advanced Exchange Service is subject to country availability. (c) For complete details about On-site Service or Advanced Exchange Service, see dell.com/servicecontracts

ALIENWARE™ 

CONNECTIVITY

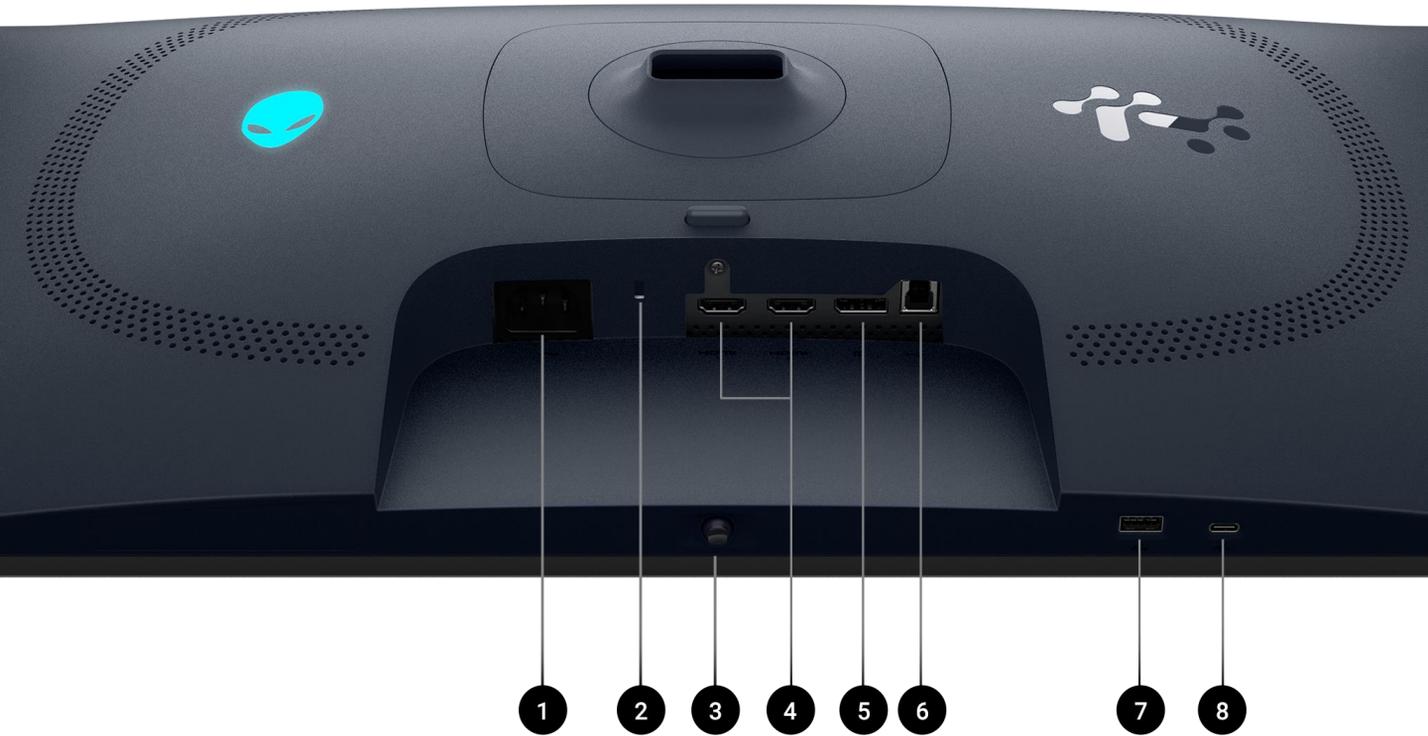

1. Power connector
2. Security lock slot
3. Joystick
4. HDMI 2.1 FRL ports x 2
5. DisplayPort
6. USB 5Gbps Type-B upstream port
7. USB 5Gbps Type-A downstream port
8. USB-C 5Gbps downstream with Power Delivery up to 15W

Cables included

- Power cable
- 1 DisplayPort-DisplayPort cable - 1.8m
- 1 HDMI FRL cable - 1.8m
- 1 USB Type-A to Type-B 5Gbps cable - 1.8m

ALIENWARE 27 280HZ QD-OLED GAMING MONITOR

AW2725D

TECH SPECS

Monitor Marketing Name	Alienware 27 QD-OLED Gaming Monitor - AW2725D
Diagonal Viewing Size	26.7 in. (678.2 mm)
Panel Type	Quantum Dots-Organic Light-Emitting Diode (QD-OLED) Technology
Maximum Resolution	2560 x 1440 up to 280 Hz
Viewing Angle	Horizontal: 178°, Vertical: 178°
Pixel Pitch	Horizontal: 0.2292 mm, Vertical: 0.2292 mm
Pixels Per Inch (PPI)	111
Contrast Ratio	1.5 million:1
Aspect Ratio	16:9
Brightness	250 cd/m ² (typical), 1000 cd/m ² (HDR peak at APL 3%)
HDR	VESA DisplayHDR True Black 400
Response Time	0.03 ms (gray-to-gray)
Color Gamut	DCI-P3 99.3% (CIE 1976) (typical)
Color Depth	1.07 billion colors
TÜV Low Blue Light	ComfortView Plus (Hardware low blue light solution)
Video Ports	1 DisplayPort 1.4 (Supports QHD 2560 x 1440, 280 Hz, HDR, DSC, VRR); 2 HDMI 2.1 FRL ports (Supports QHD 2560 x 1440, 280 Hz, 10 bit, HDR, VRR)
USB Ports	1 USB 5Gbps Type-B upstream; 1 USB 5Gbps Type-A downstream; 1 USB-C 5Gbps downstream with 15 W charging capability
Variable Refresh Rate	NVIDIA® G-SYNC® Compatible, AMD FreeSync™ Premium Pro, VESA AdaptiveSync
Adjustability	Height adjustment up to 110 mm, Tilt -5°/+21°, Swivel -20°/+20°, Pivot -90°/+90°
Display Screen Coating	Anti-reflection
PbP / PiP / KVM	Picture by Picture (PbP), Picture in Picture (PiP)
Daisy Chain Availability	Not Applicable
Software Compatibility	Alienware Command Center (AWCC) for Windows
Voltage Required	100 VAC to 240 VAC/50 Hz or 60 Hz ± 3 Hz/1.5 A
Power Consumption	On mode: 25.3 W; Maximum: 120 W, Off mode: 0.3 W; Standby mode: 0.5 W
Energy Efficiency Class (EU regulatory)	F
Audio Output	Not Applicable
Dimensions (with stand)	Height (extended): 20.33 in. (516.41 mm), Height (compressed): 16.00 in. (406.41 mm), Width: 24.00 in. (609.51 mm), Depth: 8.11 in. (206.00 mm)
Dimensions (without stand)	Height: 14.00 in. (355.58 mm), Width: 24.00 in. (609.51 mm), Depth: 2.74 in. (69.48 mm)
Weight	With packaging: 20.04 lb (9.09 kg); With stand assembly and cables: 14.00 lb (6.35 kg); Without stand assembly (without cables): 8.64 lb (3.92 kg)
Flat Panel Mount Interface	VESA (100 mm x 100 mm)
Security	Security lock slot (cable lock sold separately)
Environmental Standards	Arsenic-Free glass, Mercury-Free panel, RoHS Compliant
Temperature Range	Operating: 32°F to 104°F (0°C to 40°C), Non-Operating: -4°F to 140°F (-20°C to 60°C)
Humidity Range	Operating: 10% to 80% (non-condensing), Non-Operating: 5% to 90% (non-condensing)
Altitude	Operating: 16,404 ft (5,000 m), Non-Operating: 40,000 ft (12,192 m)
What's Included	Monitor with stand, Power cable, DisplayPort to DisplayPort 1.4 cable (1.80m), HDMI 2.1 FRL cable (1.80m), USB 5Gbps Type-A to Type-B cable (1.80m), Alienware sticker, Microfiber cloth, Quick Start guide, Safety & Regulatory information